
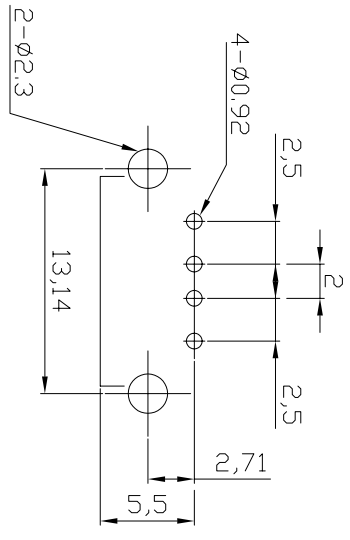


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:



DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.
1.0			

SPECIFICATIONS

- Current Rating: 1.0 Amp
- Voltage Rating: 30V AC/DC
- Insulator Resistance: 1000 M ohm min.
- Contact Resistance: 20 m ohm max.
- Dielectric withstanding: AC 750V/minute
- Operating Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Insulator Material: PBT UL94V-0
- Finish: Gold plated on contact area
Tin Plated on solder Tail
Shell: Copper Alloy
Shell Plating: Nickel Plated

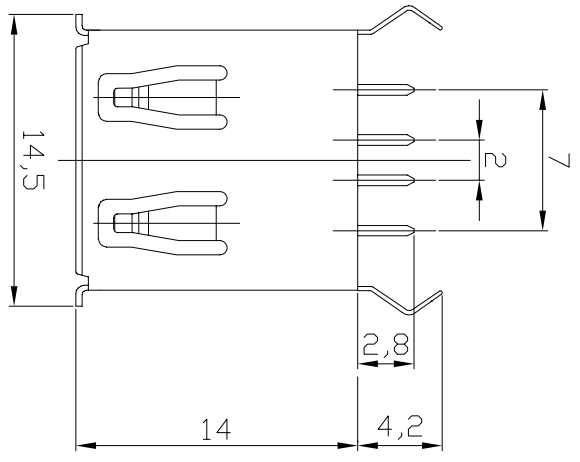

Pin Hole Layout
(Jack Bottom View)

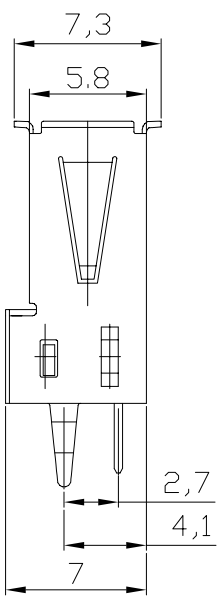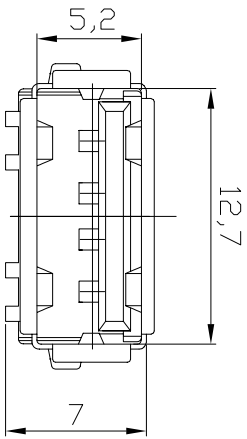

- A: A Type
- B: B Type
- C: 1394
- D: MINI

- No. DF PINS:
- S10: Single port 90°
- S15: Single port 180°
- S20: Dual port 90°
- S30: SMT

- Gold Thickness
- 00: None
- 03: 3u"
- 05: 5u"
- 10: 10u"

- Plating Material
- G: Full Gold Plated
- T: Full Tin Plated
- P: Gold Plated & Timed Tail

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC


.X = ±0.20
.XX = ±0.15

DRAW: Chubby
DATE: 10/14/05

CHECK: Kevin
APPROVE: TONY



TITLE: USB A Female Straight Type
MODEL CODE: U560A-04S15-XXXX



誠州電子有限公司
Sincere State Electronics Co., Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----