
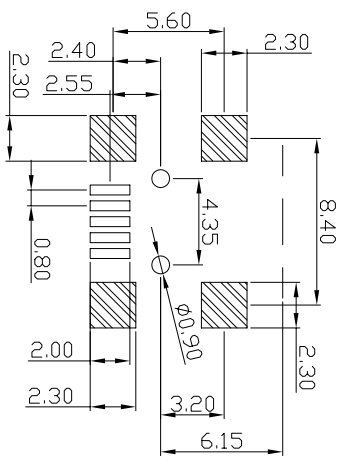


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:



DESCRIPTION CONTROL		
REV.	DESC.	DATE
1.0		
		APP.

NOTES:

1. TERMINAL PLATING:
50u" NI UNDER PLATE
ALL OVER, 150u" SN IN
TAIL AREA, MIN 2u" AU
PLATED IN CONTACT AREA
2. SHIELD PLATING:
100u" NI UNDER PLATE ALL OVER
80u" SN PLATE ALL OVER
3. ELECTRICAL SPECIFICATION:
CURRENT RATING: 0.8A
VOLTAGE RATING: 1000 VAC/60S
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
INSULATION RESISTANCE: 1000MΩ
CONTACT RESISTANCE: MAX 50MΩ
4. ENVIRONMENTAL
OPERATING TEMPERATURE: -20°C TO +70°C
STORAGE TEMPERATURE: -30°C TO +80°C

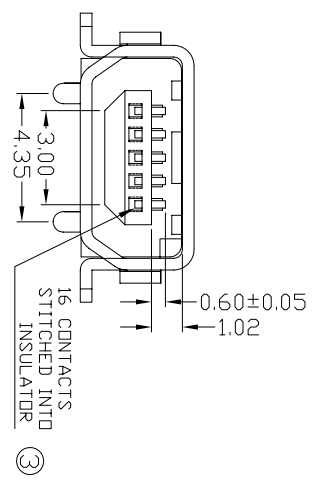

PCB LAYOUT

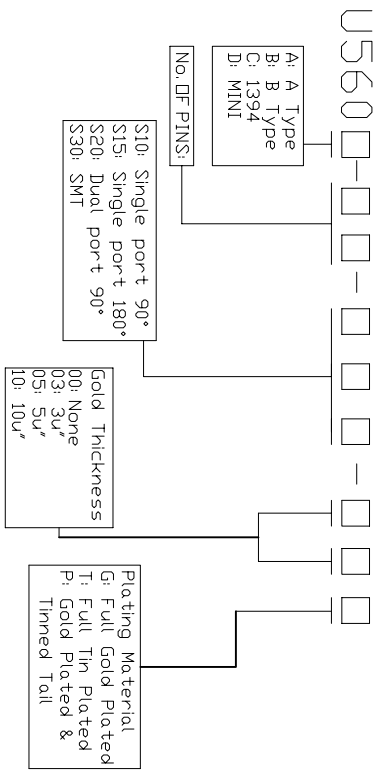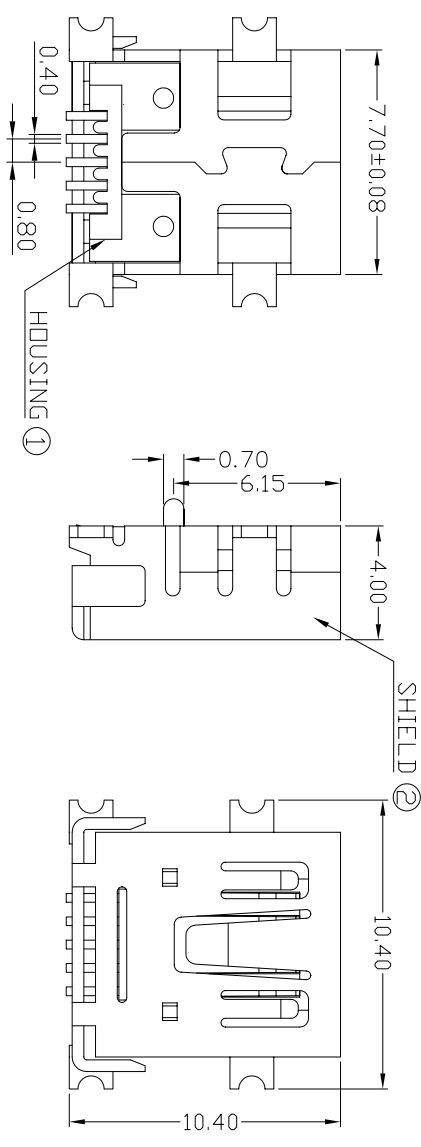

3	TERMINAL: C52110	5
2	SHIELD: BRASS	1
1	HOUSING: PA46+30%GF COLOR: BLACK	1
NO	DESCRIPTION	QTY


UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

X.	= ±0.5
.X	= ±0.2
.XX	= ±0.10
.XXX	= ±0.05

DRAW: TONY	DATE: 11/14/03
CHECK:	APPROVE:

TITLE: MINI USB(2.0)AB-SOCKET
MODEL CODE: U560D-05SS30-XXXX



誠州電子有限公司
Sincere State Electronics Co., Ltd.