

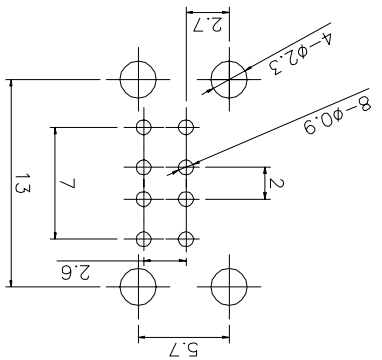

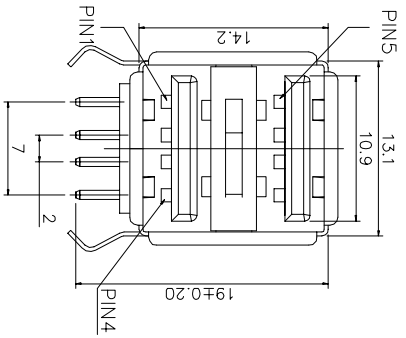


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.
1.0			

SPECIFICATIONS

Current Rating: 1.0 Amp
Voltage Rating: 30V AC/DC
Insulator Resistance: 1000 M ohm min.
Contact Resistance: 20 m ohm max.
Dielectric withstanding: AC 750V/minute
Operating Temperature: -40°C to +105°C
Contact Material: Phosphor Bronze
Insulator Material: PBT UL94V-0
Finish:
Gold plated on contact area
Tin Plated on solder Tail
Shell: Copper Alloy
Shell Plating: Nickel Plated

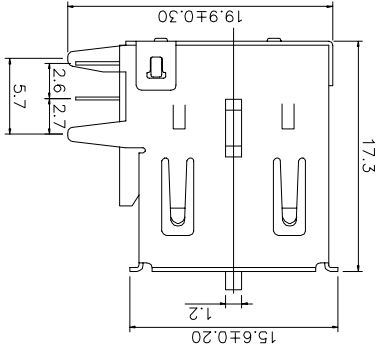

- No. OF PINS:
- S10: Single port 90°
 - S15: Single port 180°
 - S20: Dual port 90°
 - S30: SMT

- Gold Thickness
- 00: None
 - 03: 3u"
 - 05: 5u"
 - 10: 10u"

- Plating Material
- G: Full Gold Plated
 - T: Full Tin Plated
 - P: Gold Plated & Tinned Tail

- A: A Type
- B: B Type
- C: 1394
- D: MINI

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm


METRIC

X. = ±0.38
.X = ±0.25
.XX = ±0.13

DRAW:	DATE:
TONY	05/15/01
CHECK:	APPROVE:
CHARLIE	TONY

TITLE: USB A TYPE FEMALE DUAL PORT R/A

MODEL CODE: U560A-08S20-XXXX



誠州電子有限公司
Sincere State Electronics Co., Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----