

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

Electrical:


Voltage Current Rating : 1.8 Amp 30V AC.

Insulator Resistance : 100 MΩ Min.





Contact Resistance : 50 mΩ Max.

Dielectric withstanding Voltage : AC 100V R.M.S.


Temperature Range : -40°C TO +85°C

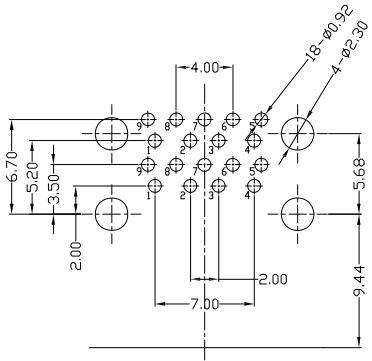

RECOMMEND PCB LAYOUT

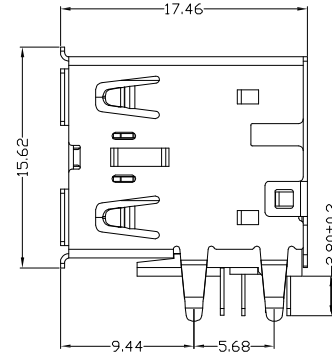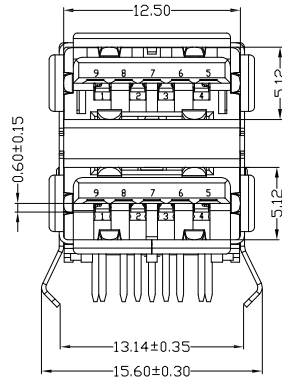

PIN NO.	1	2	3	4	5	6	7	8	9
Signal Name	VBUS	D-	D+	GND	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
Remark	USB2 Contact Pin				USB3 Contact Pin				

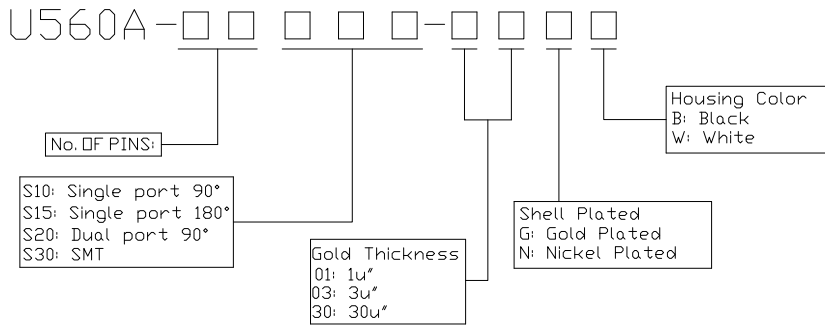

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC .X = ±0.38 .XX = ±0.25	DRAW: Alan	DATE: 10/22/15	TITLE: USB 3.0 A Female 90° Dual Dip Type
	CHECK: Kevin	APPROVE: Tony	MODEL CODE: U562A-18S20-XXX
			誠州電子有限公司 <i>Sincere State Electronics Co.,Ltd.</i>

NO	DESCRIPTION	QTY	SHEET	1	OF	1
----	-------------	-----	-------	---	----	---