







CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL	
REV.	DESC.
DATE	APP.

connector dimension modify	04/12/12	Shaddy
PCB LAYOUT 孔距15變更為14	05/11/12	Alan
PCB LAYOUT 孔距14變更為13.14	05/15/14	Alan
料號變更	04/13/22	Alan

SPECIFICATIONS

Insulator Resistance:
1000 Megohms min.
Contact Resistance:
30 m ohms max.
Dielectric withstanding:
AC 500V/minute
Contact Material:
C5191-H T=0.25mm gold/tin plated
Insulator Material:
PBT+30%GF UL94V-0
Color: Black
Shell:
SPCC T=0.30mm nickel plated
Back Cover:
SPCC T=0.3mm nickel plated
Clip: steel T=0.25mm Nickel plated
Mating force: 35N max
Umating force: 10N min.

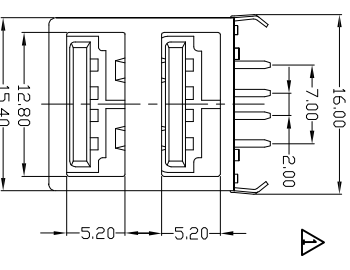

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.38
.XX = ±0.25

DRAW: Shaddy
DATE: 08/17/09


CHECK: KEVIN
APPROVE: TWY

TITLE: USB A Socket Dual port
90° DIP Type

MODEL CODE: U560G-08S20-01G ▲

QTY SHEET 1 OF 1

DESCRIPTION



誠州電子有限公司
Sincere State Electronics Co., Ltd.