CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

RoHS Compliance

Current Rating:
5 Amps
Voltage Rating:
250V AC R.M.S.
Insulator resistance:
1000 Megohms Min.
Dielectric withstanding:
DC 1000V for 1 minute
Contact resistance:
30miliohms Megohms Max.
Operating Temperature:
-55 ~ +105 ˚C
Contact Material:
Brass
Insulator Material:
PBT(UL94V-0)

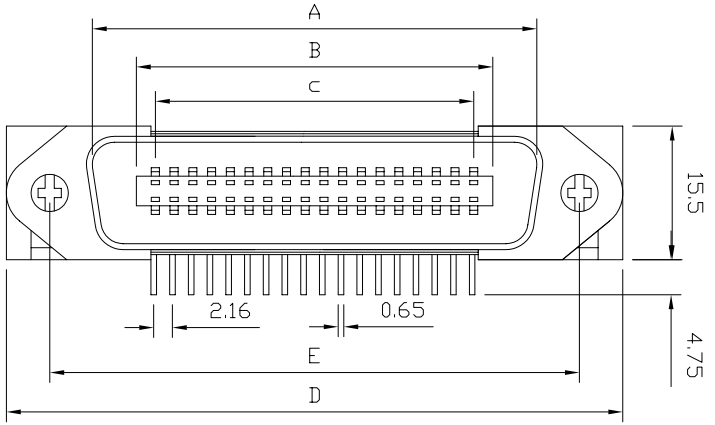

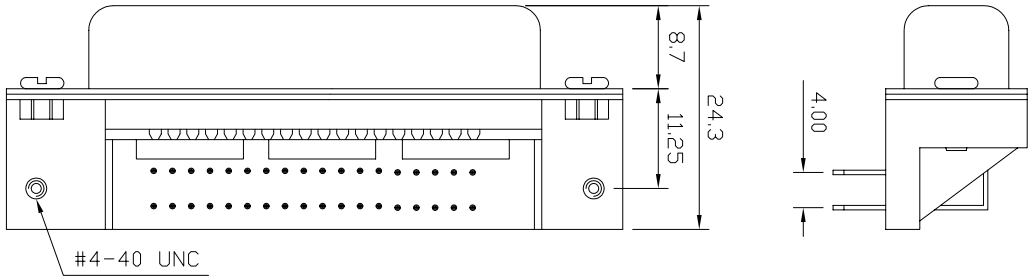

DS010-□□2□□

No. OF PINS:
14,24,36,50
Male

Contact:
1:Gold flash and Tinned Tail
2:15u" Gold on contact
3:30u" Gold on contact
4:Selective Gold (full Gold)

Assembly Type:
0:Grounding
1:Hook(Boardlock)
2:W/□ rear cover

Dimensions

Positions	A	B	C	D	E
14	25.50	17.24	12.96	44.00	36.00
24	36.10	27.98	23.76	54.76	46.80
36	49.18	40.88	36.72	67.82	59.70
50	64.45	56.10	51.84	82.92	74.90

NO	DESCRIPTION	QTY

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.38
.XX = ±0.25

DRAW:	DATE:
Chubby	01/10/07
CHECK: KEVIN	APPROVE: TONY

TITLE: D-Sub Centronic Male Right Angle Type

MODEL CODE: DS010-XX2XX

誠州電子有限公司
Sincere State Electronics Co.,Ltd.