

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.



SPFCIFICATIONS

- Current Rating: 3.0 Amp
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 1000V/minute
- Operating Temperature: -40°C to +105°C
- Contact Material: Brass
- Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
- Color: Black
- Finish: Gold, Tin or Duplex plated
- Standard: Gold flash all over
- Duplex plating: Gold plated on contact area
- Tin on solder area



RoHS Compliance



Three Two Contact Terminal

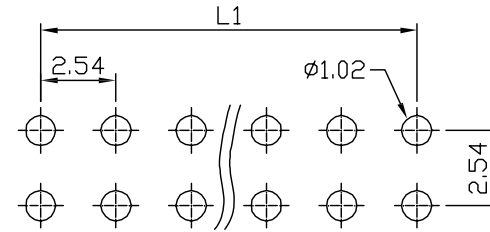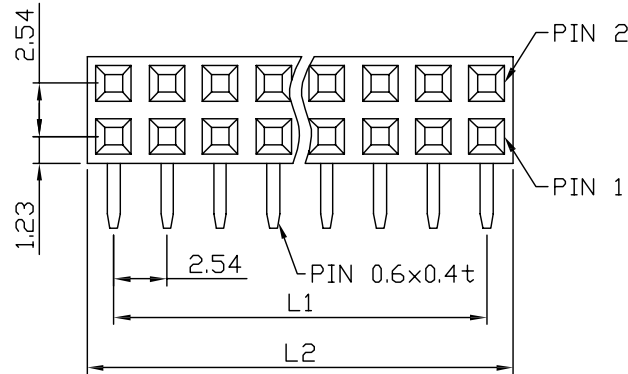

Recommended P.C.B Layout

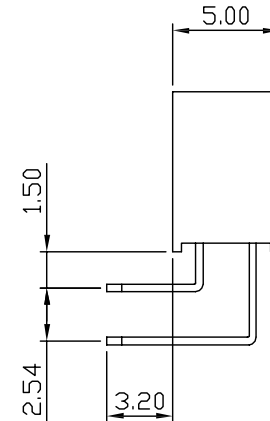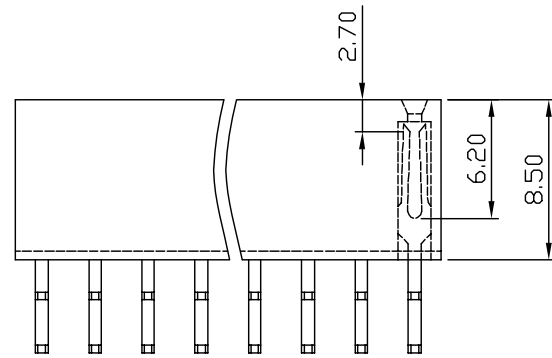

Cir-cuits	Dimension (mm)	
	L1	L2
2x2	2.54	5.58
2x3	5.08	8.12
2x4	7.62	10.66
2x5	10.16	13.20
2x6	12.70	15.74
2x7	15.24	18.28
2x8	17.78	20.82
2x9	20.32	23.36
2x10	22.86	25.90
2x11	25.40	28.44
2x12	27.94	30.98
2x13	30.48	33.52
2x14	33.02	36.06
2x15	35.56	38.60
2x16	38.10	41.14
2x17	40.64	43.68
2x18	43.18	46.22
2x19	45.72	48.76
2x20	48.26	51.30
2x21	50.80	53.84
2x22	53.34	56.38
2x23	55.88	58.92
2x24	58.42	61.46
2x25	60.96	64.00
2x26	63.50	66.54
2x27	66.04	69.08
2x28	68.58	71.62
2x29	71.12	74.16
2x30	73.66	76.70
2x31	76.20	79.24
2x32	78.74	81.78
2x33	81.28	84.32
2x34	83.82	86.86
2x35	86.36	89.40
2x36	88.90	91.94
2x37	91.44	94.48
2x38	93.98	97.02
2x39	96.52	99.56
2x40	99.06	102.10

FH P B-26 R X 2 XX-01G-XX 0

- P: PBT
- Color
- Pitch 2.54
- Right Angle Type
- Terminal Type
- Row of Pin
- Number of Contact
- 0: Without Post
- Plastic High 85:8.5
- G: Gold Plated
- T: Tin Plated
- H: Duplex Plated
- Contact Plating
- 01 Normal
- 03 3u"
- : :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.38


.XX = ±0.25

DRAW: CHUBBY

DATE: 01/10/07


CHECK: KEVIN

APPROVE: TONY



TITLE: 2.54 Female Header Right Angle Type Plastic High 8.5

MODEL CODE: FHPB-26RY2XX-01G-850



誠州電子有限公司

Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPFCIFICATIONS

Current Rating:
1.0 Amp

Insulator Resistance:
1000 Mohms min at DC 250V

Contact Resistance:
30 m ohms max.

Dielectric withstanding:
AC 500V/minute



Operating Temperature:
-55°C to +105°C

Contact Material:
Phosphor Brass



Insulator Material:
PBT&30% Glass Fiber UL94V-0

Color: Black

Finish:
Tin plated over Nickel

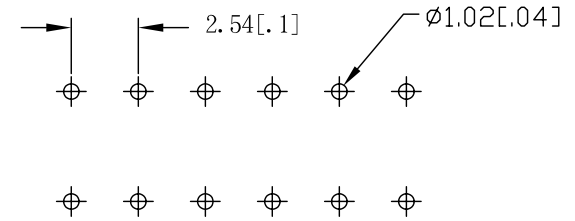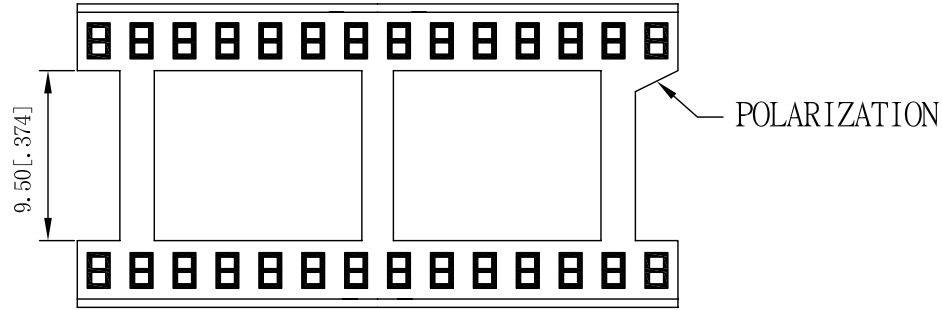

RECOMMENDED P.C.B LAYOUT

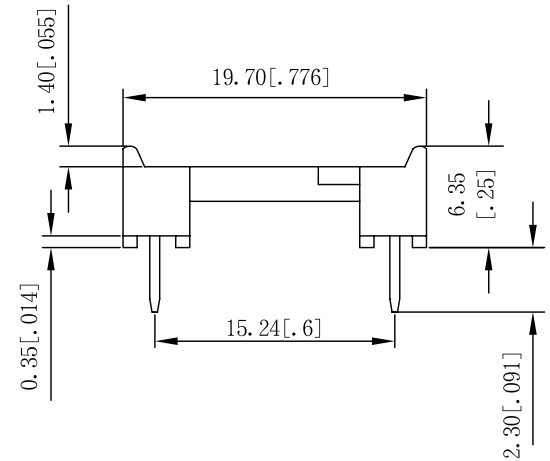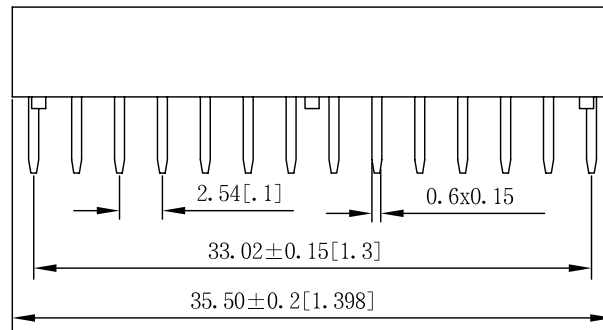

ISP B-26 V X 2 XX-01G-XX

P: PBT
Color
Pitch 2.54
Straight Type
Terminal Type
Row of Pin
Number of Contact

Plastic High 63:6.35
G: Gold Plated
T: Tin Plated
H: Duplex Plated
Contact Plating
01 Normal
03 3u"
: :
: :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC .X = ±0.38 .XX = ±0.25	DRAW: CHUBBY	DATE: 12/07/01	TITLE: 2.54 28P IC Socket Dual Row
	CHECK: KEVIN	APPROVE: TONY	MODEL CODE: ISP B-26VY228-01G-63
			 誠州電子有限公司 <i>Sincere State Electronics Co.,Ltd.</i>

NO	DESCRIPTION	QTY

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPFCIFICATIONS

Current Rating:
3.0 Amp

Insulator Resistance:
5000 Megohms min.

Contact Resistance:
20 m ohms max.

Dielectric withstanding:
AC 1000V/minute

Operating Temperature:
-40°C to +105°C


Contact Material:
Phosphor Bronze

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0


Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plating:
Gold plated on contact area
Tin on solder area


RoHS Compliance






Three Side Contact Terminal

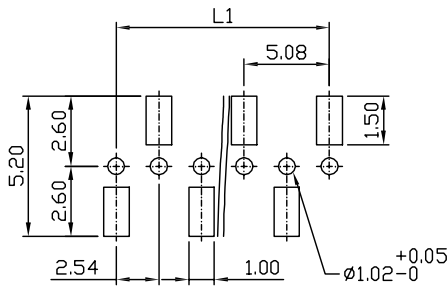

Recommended P.C.B Layout (Type B)

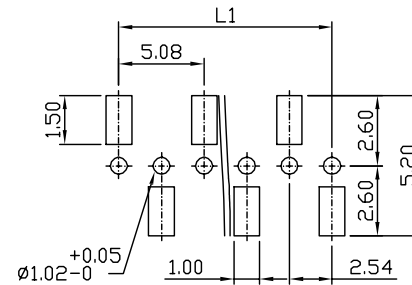

Recommended P.C.B Layout (Type A)

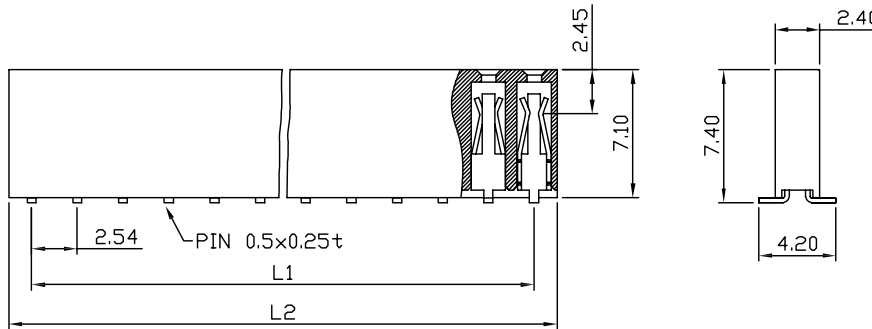

FH N B-26 M X 1 XX-01G-71 0

N: Nylon
Color
Pitch 2.54
SMT Type
Terminal Type
Row of Pin
Number of Contact

0: Without Post
Plastic High 71:7.1
G: Gold Plated
T: Tin Plated
H: Duplex Plated
Contact Plating
01 Normal
03 3u"
: :
: :

Circuits	Dimension (mm)	
	L1	L2
2x2	2.54	5.58
2x3	5.08	8.12
2x4	7.62	10.66
2x5	10.16	13.20
2x6	12.70	15.74
2x7	15.24	18.28
2x8	17.78	20.82
2x9	20.32	23.36
2x10	22.86	25.90
2x11	25.40	28.44
2x12	27.94	30.98
2x13	30.48	33.52
2x14	33.02	36.06
2x15	35.56	38.60
2x16	38.10	41.14
2x17	40.64	43.68
2x18	43.18	46.22
2x19	45.72	48.76
2x20	48.26	51.30
2x21	50.80	53.84
2x22	53.34	56.38
2x23	55.88	58.92
2x24	58.42	61.46
2x25	60.96	64.00
2x26	63.50	66.54
2x27	66.04	69.08
2x28	68.58	71.62
2x29	71.12	74.16
2x30	73.66	76.70
2x31	76.20	79.24
2x32	78.74	81.78
2x33	81.28	84.32
2x34	83.82	86.86
2x35	86.36	89.40
2x36	88.90	91.94
2x37	91.44	94.48
2x38	93.98	97.02
2x39	96.52	99.56
2x40	99.06	102.10

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC .X = ±0.38 .XX = ±0.25	DRAW: CHUBBY	DATE: 01/10/07	TITLE: 2.54 Female Header SMT Type Plastic High 7.1
	CHECK: KEVIN	APPROVE: TONY	MODEL CODE: FHNB-26MT1XX-01G-710
			誠州電子有限公司 Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.


SPFCIFICATIONS

- Current Rating: 3.0 Amp
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 1000V/minute
- Operating Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
- Color: Black
- Finish: Gold, Tin or Duplex plated
- Standard: Gold flash all over
- Duplex plating: Gold plated on contact area
- Tin on solder area


RoHS Compliance






Three Side Contact Terminal

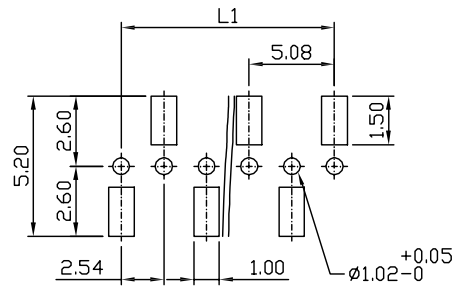

Recommended P.C.B Layout (Type B)

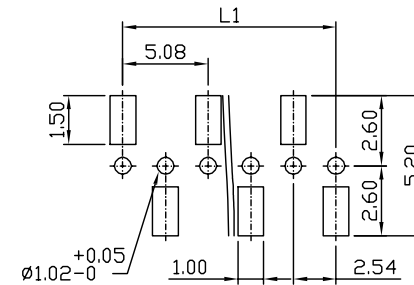

Recommended P.C.B Layout (Type A)

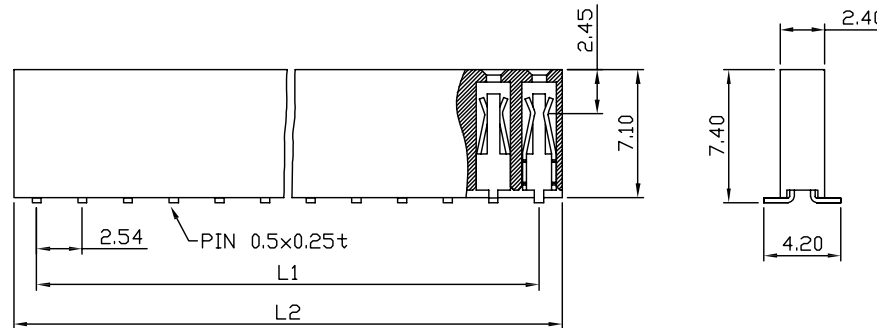

FH N B-26 M X 1 XX-01G-71 0

- N: Nylon Color
- B: Pitch 2.54
- M: SMT Type
- X: Terminal Type
- 1: Row of Pin
- XX: Number of Contact
- 0: Without Post
- G: Gold Plated
- T: Tin Plated
- H: Duplex Plated
- 71: Plastic High 71:7.1
- 01: Contact Plating 01 Normal
- 03: 3u"

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ± 0.38

.XX = ± 0.25

DRAW: CHUBBY


DATE: 01/10/07

CHECK: KEVIN

APPROVE: TONY

TITLE: 2.54 Female Header SMT Type Plastic High 7.1

MODEL CODE: FHNB-26MT1XX-01G-710



誠州電子有限公司

Sincere State Electronics Co.,Ltd.

Circuits	Dimension (mm)	
	L1	L2
2x2	2.54	5.58
2x3	5.08	8.12
2x4	7.62	10.66
2x5	10.16	13.20
2x6	12.70	15.74
2x7	15.24	18.28
2x8	17.78	20.82
2x9	20.32	23.36
2x10	22.86	25.90
2x11	25.40	28.44
2x12	27.94	30.98
2x13	30.48	33.52
2x14	33.02	36.06
2x15	35.56	38.60
2x16	38.10	41.14
2x17	40.64	43.68
2x18	43.18	46.22
2x19	45.72	48.76
2x20	48.26	51.30
2x21	50.80	53.84
2x22	53.34	56.38
2x23	55.88	58.92
2x24	58.42	61.46
2x25	60.96	64.00
2x26	63.50	66.54
2x27	66.04	69.08
2x28	68.58	71.62
2x29	71.12	74.16
2x30	73.66	76.70
2x31	76.20	79.24
2x32	78.74	81.78
2x33	81.28	84.32
2x34	83.82	86.86
2x35	86.36	89.40
2x36	88.90	91.94
2x37	91.44	94.48
2x38	93.98	97.02
2x39	96.52	99.56
2x40	99.06	102.10

NO	DESCRIPTION	QTY
----	-------------	-----


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.



SPFCIFICATIONS

- Current Rating:
3.0 Amp
- Insulator Resistance:
5000 Megohms min.
- Contact Resistance:
20 m ohms max.
- Dielectric withstanding:
AC 1000V/minute
- Operating Temperature:
-40°C to +105°C
- Contact Material:
Phosphor Bronze
- Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
- Color: Black
- Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plating:
Gold plated on contact area
Tin on solder area


RoHS Compliance



Three Side Contact Terminal

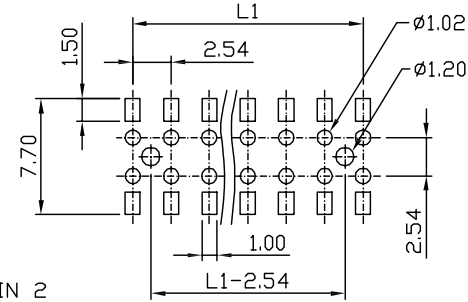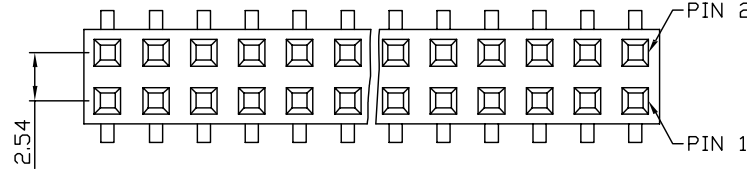

Recommended P.C.B Layout

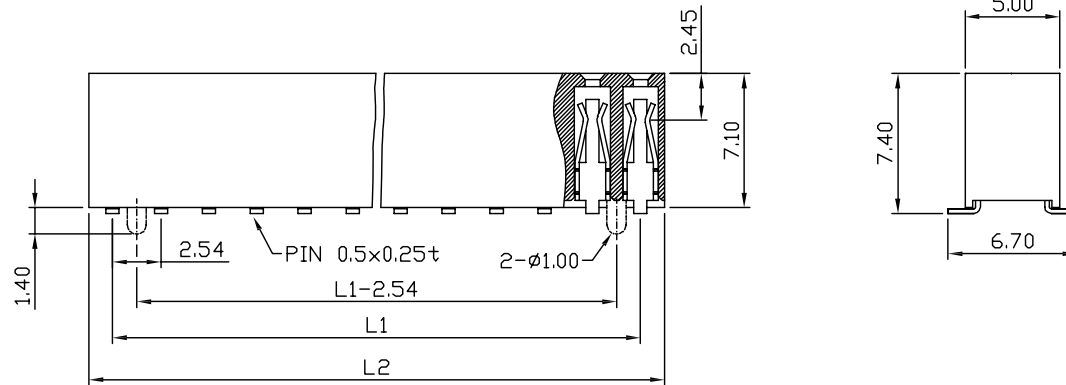

Cir-cuits	Dimension (mm)	
	L1	L2
2x2	2.54	5.58
2x3	5.08	8.12
2x4	7.62	10.66
2x5	10.16	13.20
2x6	12.70	15.74
2x7	15.24	18.28
2x8	17.78	20.82
2x9	20.32	23.36
2x10	22.86	25.90
2x11	25.40	28.44
2x12	27.94	30.98
2x13	30.48	33.52
2x14	33.02	36.06
2x15	35.56	38.60
2x16	38.10	41.14
2x17	40.64	43.68
2x18	43.18	46.22
2x19	45.72	48.76
2x20	48.26	51.30
2x21	50.80	53.84
2x22	53.34	56.38
2x23	55.88	58.92
2x24	58.42	61.46
2x25	60.96	64.00
2x26	63.50	66.54
2x27	66.04	69.08
2x28	68.58	71.62
2x29	71.12	74.16
2x30	73.66	76.50
2x31	76.20	79.24
2x32	78.74	81.78
2x33	81.28	84.32
2x34	83.82	86.86
2x35	86.36	89.40
2x36	88.90	91.94
2x37	91.44	94.48
2x38	93.98	97.02
2x39	96.52	99.56
2x40	99.06	102.10

FH N B-26 M X 2 XX-01 G-71 0

- N: Nylon-6T
- Color
- Pitch 2.54
- SMT Type
- Terminal Type
- Row of Pin
- Number of Contact
- 0: Without Post
- Plastic High 71:7.1
- G: Gold Plated
- T: Tin Plated
- H: Duplex Plated
- Contact Plating
- 01 Normal
- 03 3u"
- :
- :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.38

.XX = ±0.25

DRAW: CHUBBY


DATE: 01/10/07

CHECK: KEVIN

APPROVE: TONY

TITLE: 2.54 Female Header SMT Type Plastic High 7.1

MODEL CODE: FHNB-26MT2XX-01G-710



誠州電子有限公司
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.



SPFCIFICATIONS

- Current Rating: 3.0 Amp
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 1000V/minute
- Operating Temperature: -40°C to +105°C
- Contact Material: Brass
- Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
- Color: Black
- Finish: Gold, Tin or Duplex plated
- Standard: Gold flash all over
- Duplex plating: Gold plated on contact area
- Tin on solder area



RoHS Compliance



Three Two Contact Terminal

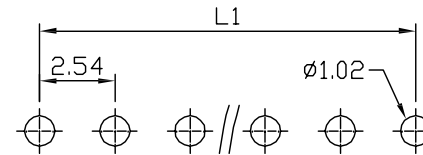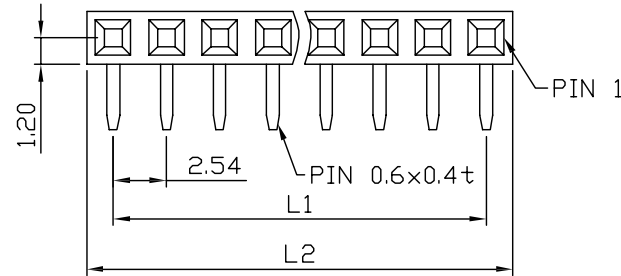

Recommended P.C.B Layout

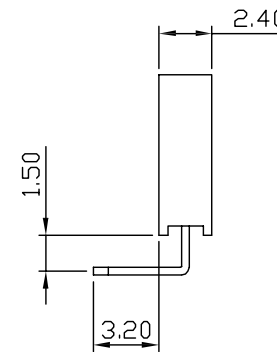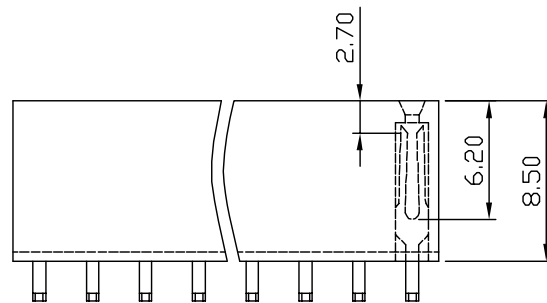

Cir-cuits	Dimension (mm)	
	L1	L2
2	2.54	5.58
3	5.08	8.12
4	7.62	10.66
5	10.16	13.20
6	12.70	15.74
7	15.24	18.28
8	17.78	20.82
9	20.32	23.36
10	22.86	25.90
11	25.40	28.44
12	27.94	30.98
13	30.48	33.52
14	33.02	36.06
15	35.56	38.60
16	38.10	41.14
17	40.64	43.68
18	43.18	46.22
19	45.72	48.76
20	48.26	51.30
21	50.80	53.84
22	53.34	56.38
23	55.88	58.92
24	58.42	61.46
25	60.96	64.00
26	63.50	66.54
27	66.04	69.08
28	68.58	71.62
29	71.12	74.16
30	73.66	76.70
31	76.20	79.24
32	78.74	81.78
33	81.28	84.32
34	83.82	86.86
35	86.36	89.40
36	88.90	91.94
37	91.44	94.48
38	93.98	97.02
39	96.52	99.56
40	99.06	102.10

FH P B-26 R X 1 XX-01G-XX 0

- P: PBT
- Color
- Pitch 2.54
- Right Angle Type
- Terminal Type
- Row of Pin
- Number of Contact
- 0: Without Post
- Plastic High 85:8.5
- G: Gold Plated
- T: Tin Plated
- H: Duplex Plated
- Contact Plating
- 01 Normal
- 03 3u"

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm


METRIC

.X = ±0.38

.XX = ±0.25

DRAW:	DATE:
CHUBBY	01/10/07
CHECK:	APPROVE:
KEVIN	TONY

TITLE:	2.54 Female Header Right Angle Type Plastic High 8.5
MODEL CODE:	FHPB-26RY1XX-01G-850



誠州電子有限公司
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPFCIFICATIONS

Current Rating:
3.0 Amp

Insulator Resistance:
5000 Megohms min.

Contact Resistance:
20 m ohms max.

Dielectric withstanding:
AC 1000V/minute

Operating Temperature:
-40°C to +105°C


Contact Material:
Phosphor Bronze

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0



Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plating:
Gold plated on contact area
Tin on solder area



RoHS Compliance



Three Side Contact Terminal

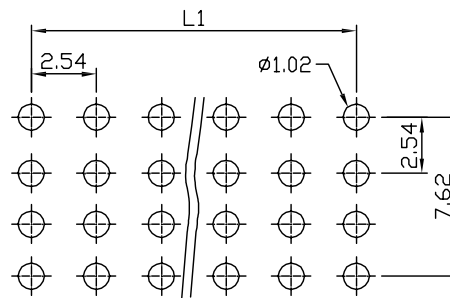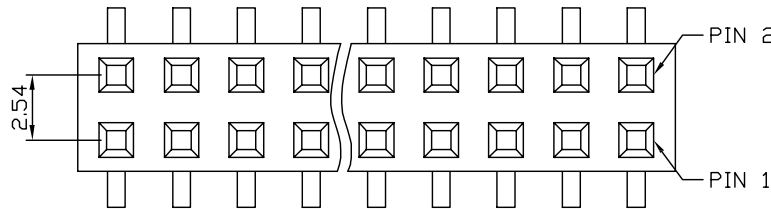

Recommended P.C.B. Layout

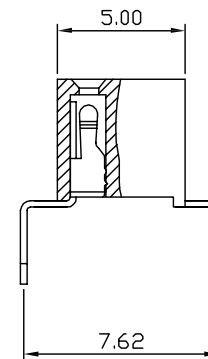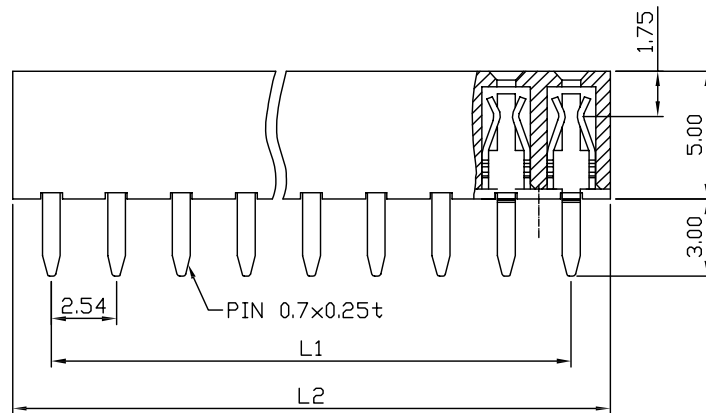

Cir- cuits	Dimension (mm)	
	L1	L2
2x2	2.54	5.58
2x3	5.08	8.12
2x4	7.62	10.66
2x5	10.16	13.20
2x6	12.70	15.74
2x7	15.24	18.28
2x8	17.78	20.82
2x9	20.32	23.36
2x10	22.86	25.90
2x11	25.40	28.44
2x12	27.94	30.98
2x13	30.48	33.52
2x14	33.02	36.06
2x15	35.56	38.60
2x16	38.10	41.14
2x17	40.64	43.68
2x18	43.18	46.22
2x19	45.72	48.76
2x20	48.26	51.30
2x21	50.80	53.84
2x22	53.34	56.38
2x23	55.88	58.92
2x24	58.42	61.46
2x25	60.96	64.00
2x26	63.50	66.54
2x27	66.04	69.08
2x28	68.58	71.62
2x29	71.12	74.16
2x30	73.66	76.70
2x31	76.20	79.24
2x32	78.74	81.78
2x33	81.28	84.32
2x34	83.82	86.86
2x35	86.36	89.40
2x36	88.90	91.94
2x37	91.44	94.48
2x38	93.98	97.02
2x39	96.52	99.56
2x40	99.06	102.10

FH N B-26 U X 2 XX-01G-50 0

N: Nylon
Color
Pitch 2.54
Side Entry Type
Terminal Type
Row of Pin
Number of Contact

0: Without Post
Plastic High 50:5.0
G: Gold Plated
T: Tin Plated
H: Duplex Plated
Contact Plating
01 Normal
03 3u"
: :
: :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC


.X = ±0.38
.XX = ±0.25

DRAW: CHUBBY
CHECK: KEVIN

DATE: 01/10/07
APPROVE: TONY

TITLE: 2.54 Female Header Side Entry Type Plastic High 5.0

MODEL CODE: FHNB-26UT2XX-01G-500



誠州電子有限公司
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----



CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.



SPFCIFICATIONS

- Current Rating: 3.0 Amp
- Insulator Resistance: 5000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric withstanding: AC 1000V/minute
- Operating Temperature: -40°C to +105°C
- Contact Material: Brass
- Insulator Material: PBT UL94V-0
- Color: Black
- Finish: Gold, Tin or Duplex plated
- Standard: Gold flash all over
- Duplex plating: Gold plated on contact area
- Tin on solder area

RoHS Compliance

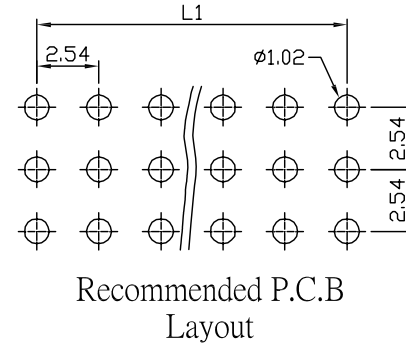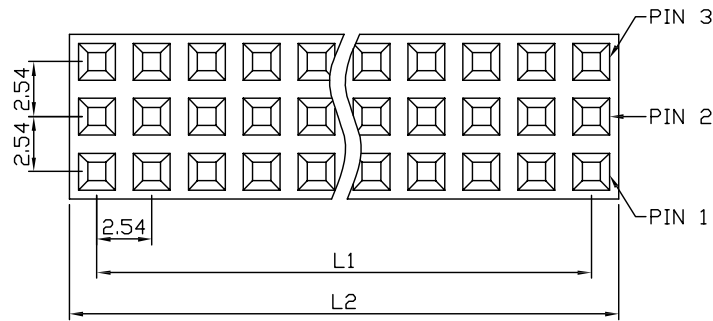

Cir-cuits	Dimension (mm)	
	L1	L2
3x3	5.08	8.12
3x4	7.62	10.66
3x5	10.16	13.20
3x6	12.70	15.74
3x7	15.24	18.28
3x8	17.78	20.82
3x9	20.32	23.36
3x10	22.86	25.90
3x11	25.40	28.44
3x12	27.94	30.98
3x13	30.48	33.52
3x14	33.02	36.06
3x15	35.56	38.60
3x16	38.10	41.14
3x17	40.64	43.68
3x18	43.18	46.22
3x19	45.72	48.76
3x20	48.26	51.30
3x21	50.80	53.84
3x22	53.34	56.38
3x23	55.88	58.92
3x24	58.42	61.46
3x25	60.96	64.00
3x26	63.50	66.54
3x27	66.04	69.08
3x28	68.58	71.62
3x29	71.12	74.16
3x30	73.66	76.70
3x31	76.20	79.24
3x32	78.74	81.78

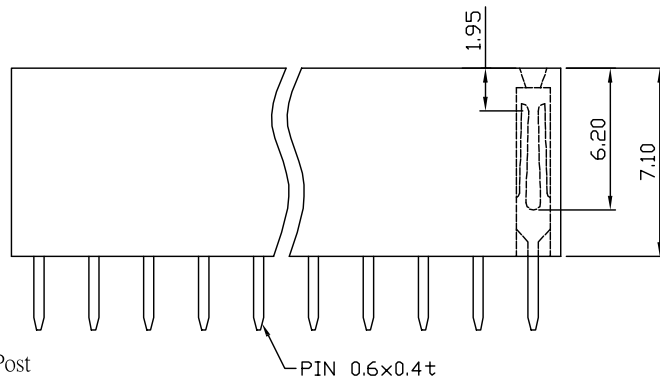

Three Two Contact Terminal

FH N B-26 V X 3 XX-01G-71 0

- N: Nylon Color
- B: Pitch 2.54
- V: Straight Type
- X: Terminal Type
- 3: Row of Pin
- XX: Number of Contact
- 01: Contact Plating Normal
- 03: Contact Plating 3u"
- G: Gold Plated
- T: Tin Plated
- H: Duplex Plated
- 71: Plastic High 71:7.1
- 0: Without Post

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.38

.XX = ±0.25

DRAW: CHUBBY


DATE: 01/10/07

CHECK: KEVIN

APPROVE: TONY

TITLE: 2.54 Female Header Straight Type Plastic High 7.1

MODEL CODE: FHNB-26VY3XX-01G-710



誠州電子有限公司
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPFCIFICATIONS

Current Rating:
3.0 Amp

Insulator Resistance:
5000 Megohms min.

Contact Resistance:
20 m ohms max.

Dielectric withstanding:
AC 1000V/minute

Operating Temperature:
-40°C to +105°C


Contact Material:
Phosphor Bronze

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0



Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plating:
Gold plated on contact area
Tin on solder area



RoHS Compliance



Three Side Contact Terminal

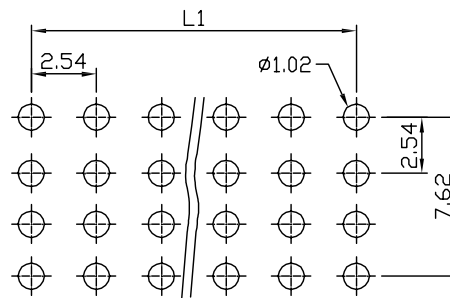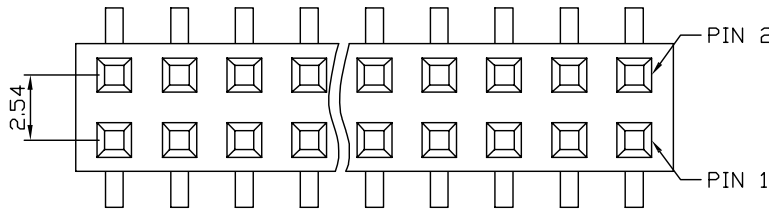

Recommended P.C.B. Layout

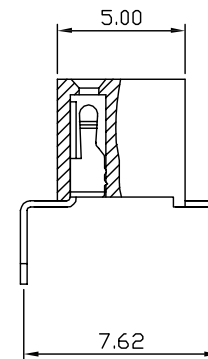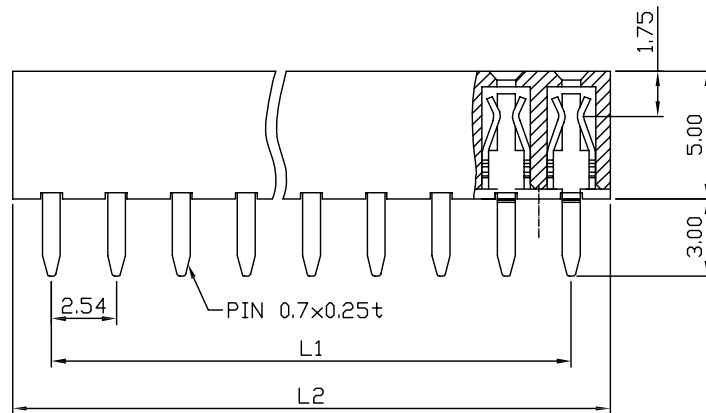

Cir- cuits	Dimension (mm)	
	L1	L2
2x2	2.54	5.58
2x3	5.08	8.12
2x4	7.62	10.66
2x5	10.16	13.20
2x6	12.70	15.74
2x7	15.24	18.28
2x8	17.78	20.82
2x9	20.32	23.36
2x10	22.86	25.90
2x11	25.40	28.44
2x12	27.94	30.98
2x13	30.48	33.52
2x14	33.02	36.06
2x15	35.56	38.60
2x16	38.10	41.14
2x17	40.64	43.68
2x18	43.18	46.22
2x19	45.72	48.76
2x20	48.26	51.30
2x21	50.80	53.84
2x22	53.34	56.38
2x23	55.88	58.92
2x24	58.42	61.46
2x25	60.96	64.00
2x26	63.50	66.54
2x27	66.04	69.08
2x28	68.58	71.62
2x29	71.12	74.16
2x30	73.66	76.70
2x31	76.20	79.24
2x32	78.74	81.78
2x33	81.28	84.32
2x34	83.82	86.86
2x35	86.36	89.40
2x36	88.90	91.94
2x37	91.44	94.48
2x38	93.98	97.02
2x39	96.52	99.56
2x40	99.06	102.10

FH P B-26 H X 2 XX-01G-50 0

P: PBT
Color
Pitch 2.54
Side Entry Type
Terminal Type
Row of Pin
Number of Contact

0: Without Post
Plastic High 50:5.0
G: Gold Plated
T: Tin Plated
H: Duplex Plated
Contact Plating
01 Normal
03 3u"
: :
: :

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC


.X = ±0.38
.XX = ±0.25

DRAW: CHUBBY
CHECK: KEVIN

DATE: 01/10/07
APPROVE: TONY

TITLE: 2.54 Female Header Side Entry Type Plastic High 5.0

MODEL CODE: FHPB-26HT2XX-01G-500



誠州電子有限公司
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY